

Sawyer Flush Mount

KSF1043 | 1.0

GENERATION LIGHTING FLUSH MOUNT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!



GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

IA

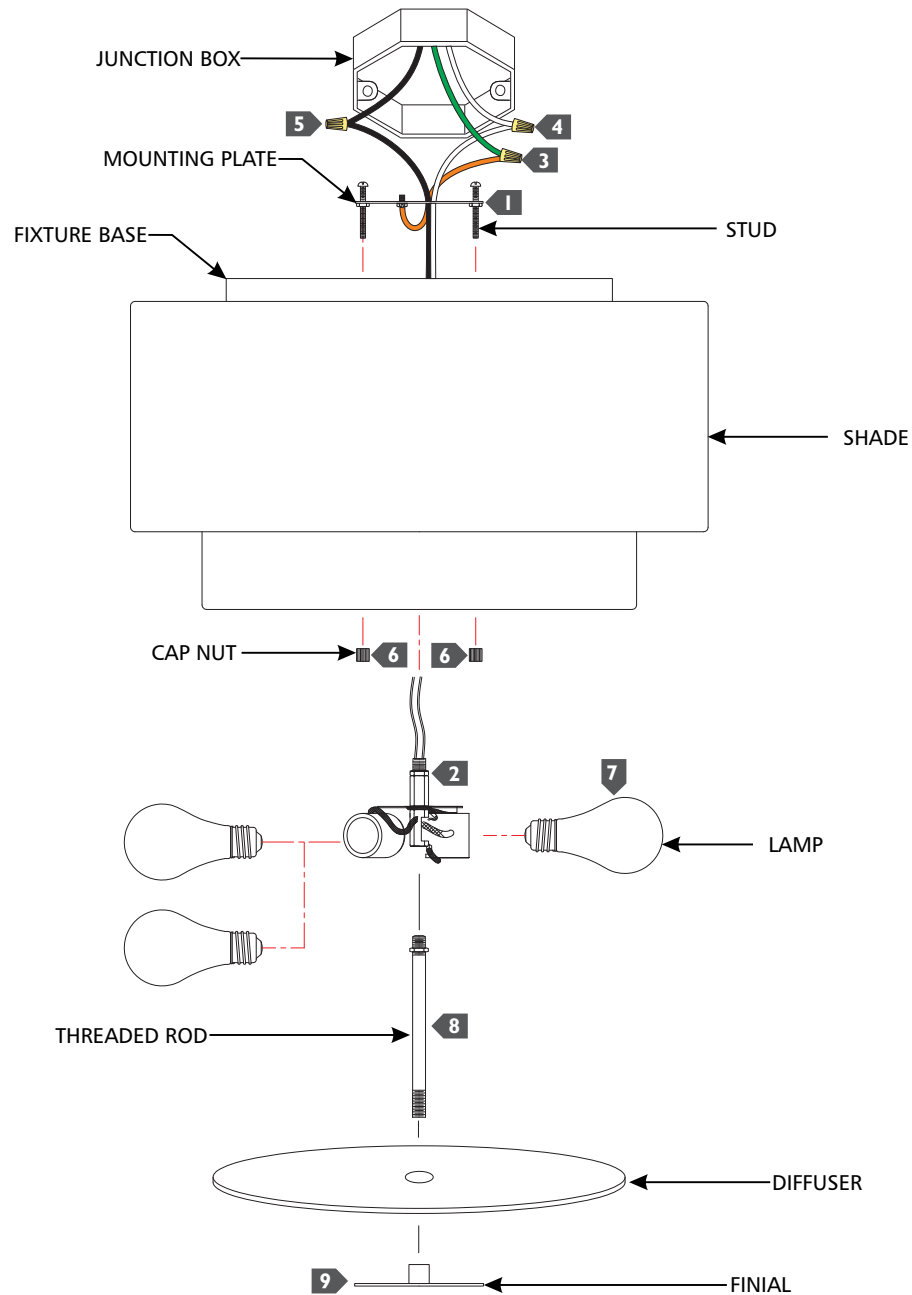

- 1** Secure the mounting plate to the junction box.
- 2** Feed the fixture wires through the shade and fixture base, then screw the socket assembly into the fixture base.
- 3** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.
- 6** Neatly tuck the wiring into the junction box, place the fixture base onto the studs, and secure it in place with the cap nuts.
- 7** Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
- 8** Screw the threaded rod into the socket assembly.
- 9** Lift the diffuser onto the threaded rod and secure in place with the finial.